

SPECIFICATIONS

20

EASTHAM™ TWO HANDLE CENTERSET LAVATORY FAUCET

Model

D301015

Description

- · Ceramic disc valves
- 6 3/4" high spout, 4 1/2" spout length, laminar flow
- 50/50 pop-up drain assembly
- 3 hole mount
- Flow rate: 1.5 gpm @ 60 psi

Standards



- NSF 61-9
- Energy Policy Act of 1992



- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372



Buildings and Facilities -

• ADA Accessibility Guidelines for 4.27.4 Controls and Mechanisms

Flow Rate 2 1.5 1 0.5



80





Finishes Available

- Chrome
- · Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



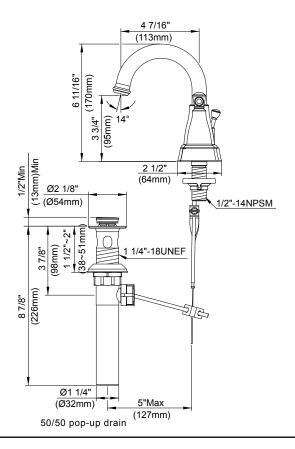

Contractor: _

Job Name: _

Location: _ Contact #:_