
Submitted Model No.:_______Specific Features:



▲ Designate Proper Finish Suffix

Spray Pattern

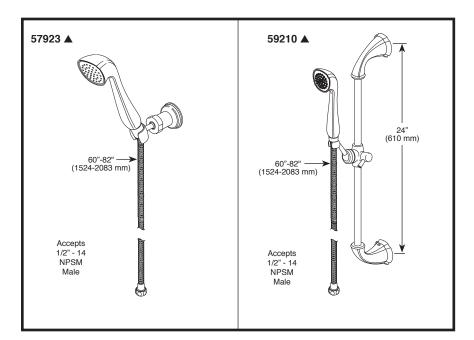

Full Spray

◆ Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.



see what Delta can do

PERSONAL HAND HELD SHOWERS

■ 24" Wall Bar or Wall Mount

FEATURES:

■ Touch-Clean® Nozzles

STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi; 6.6 L/min @ 550 kPa
- Hand held shower with one spray pattern
- 60"-82" (1524-2083 mm) stretchable metal hose
- Certified dual check valves for backflow protection
- 24" (610 mm) all metal construction wall bar with adjustable slide (allows for adjustable shower height) -59210 only. Not to be used as a Grab Bar. Not ADA compliant.
- Wall mount bracket 57923 only

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- EPA WaterSense®