



8328 MacArthur Drive North Little Rock, AR 72118-2029 501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 www.jasoninternational.com

Excel[™] Series Specifications Whirlpool & Soaking - JAS3260 SL/SR

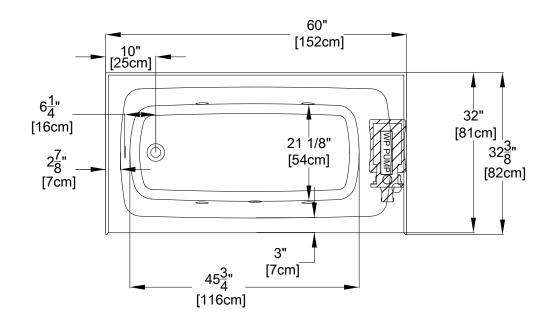

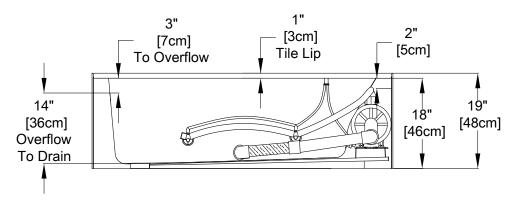

Available in End Access (Installer Provided) or Side Access (Factory Provided Removable Panel Whirlpool Bath Only)

Patents received or pending. Note: Dimensional Tolerances: ±1/4"

Drop-in-Hole Size: N/A
Operating Capacity: 25 Gal.
Overflow Capacity: 46 Gal.
Floor Loading / sq.ft.: 43.7/40.5 lbs.
Carton Weight: 108/74 lbs.
Cube: 23.4 ft.³



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on pre-leveled support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.