

# LP18248

Specification Sheet

## Linear Pendant

PROJECT					
DATE				TYPE	
Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)	
120V	32W	3150lm	940lm*	BK - Black	Color Temp 3000K
120V	32W	3150lm	1210lm*	BN - Brushed Nickel	CRI(Ra) >90
120V	32W	3150lm	1050lm*	GD - Gold	Dimming 100%-10%
120V	32W	3150lm	1450lm*	WH - White	Rated Life 50,000 hours

\*Preliminary figures



BK - Black




GD - Gold



WH - White



BN - Brushed Nickel

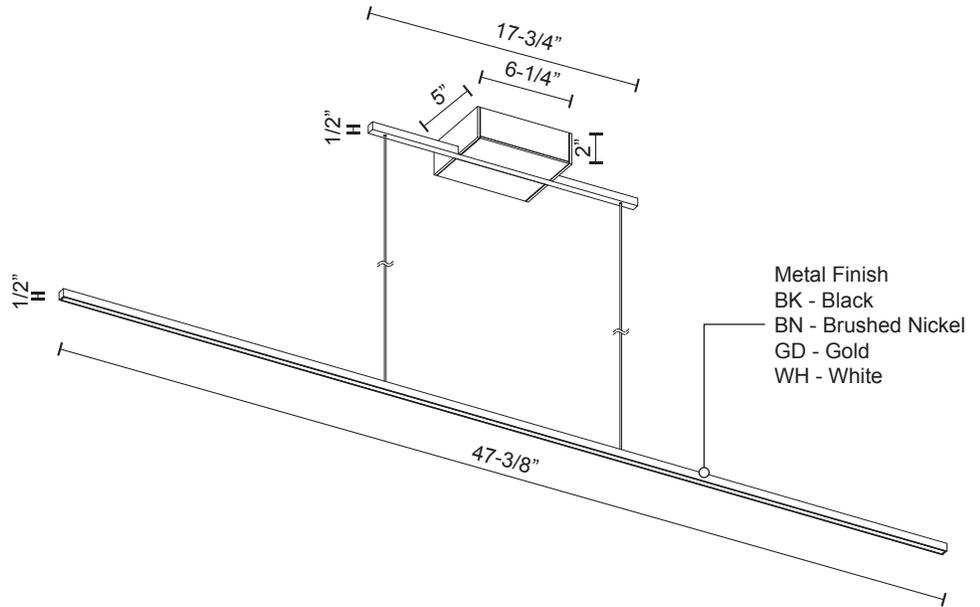

### Product Descriptions

Square profile linear aluminum with thin cables.  
Inset opal polymeric diffuser.  
Finely textured plate or powder-coat finish.

### Product Details

High system efficacy. Low total life cycle cost. ETL Listed.  
5-years warranty.  
Complete warranty terms located at: [www.kuzcolighting.com/warranty](http://www.kuzcolighting.com/warranty)  
Utilizes our LED Driver Light Engine.  
LED Driver within canopy.  
Down light distribution.  
Max. cable length of 120".  
Dimmable with ELV or TRIAC dimmer (not included)  
Custom options available.

Canopy dimensions:  
L: 6-1/4"; W: 5"; H: 2"

Comments: